




HIGH-BUILT
NØN-SAG
MARINE
EPOXY






- ✓ No sagging/dripping even on overhead applications
- ✓ Bonds well even on damp substrates
- ✓ Less consumption compared to ordinary putties
- ✓ Ideal for wood, plastic, fiberglass, concrete & metal

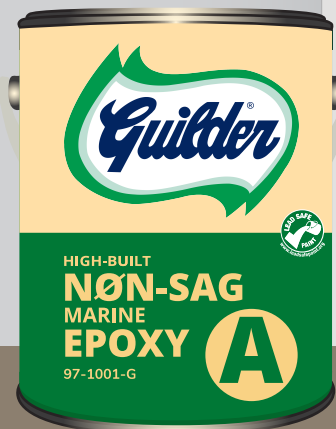

HIGH-BUILT NON-SAG MARINE EPOXY

GUILDER HIGH-BUILT NON-SAG (MARINE) EPOXY (PART A and PART B) is a two-component epoxy-polyamide based coating system designed for use as a high strength adhesive, sealant and filler for vertical, horizontal and overhead applications of up to 10mm thickness without dripping or sagging. It provides water and chemical resistant properties making it ideal to use on household, industrial and even marine applications since it bonds well to wide range of dry or damp substrates such as concrete, woods, plastics, fiberglass and metals.



APPLICATION SYSTEM

Place equal parts by weight or volume of Part A and Part B on painter's palette or putty knife. Mix thoroughly by a back and forth wiping motion until color is uniform. It is recommended to allow mixed material to mature for at least 15-30 minutes prior to use. Prepare only sufficient quantity which can be worked out within the pot life of 1-1 ½ hours. It can be sanded after initial cure time of 4-6 hours. Prime and paint as required after 2-4 days full curing time.

SURFACE PREPARATION

To ensure good adhesion, surfaces to be worked on must be thoroughly cleaned and roughened by sanding or grinding, completely free from wax, oil, grease, rust, moisture and other foreign matter.

STORAGE & DISPOSAL

Store in a cool, well-ventilated area. Do not disposed in water drains. Contain and collect spillage immediately and dispose in accordance with government regulations

TECHNICAL INFORMATION

	Package Viscosity	Density	Color	Mixing Ratios by Weight	Mixing Ratios by Volume	Pot Life	Initial Cure Time	Full Cure Time
PART A	Heavy Paste	1.82 kg/liter	Yellow Ochre	1:1	1:1	1-1 ½ Hrs	4-6 Hrs (to sand)	48 Hrs
PART B		1.74 kg/liter	Beige					

HIGH-BUILT NON-SAG MARINE EPOXY



HAZARD STATEMENTS:

Causes skin irritation. Causes serious eye irritation. May cause an allergic skin reaction. May damage fertility or the unborn child. May cause damage to liver and kidney through prolonged or repeated exposure. Toxic to aquatic life with long lasting effects.

PRECAUTIONARY STATEMENTS:

Keep out of reach of children. Keep only in original packaging. Do not breathe dust/fume/gas/mist/vapors/spray. Avoid contact during pregnancy and while nursing. Wash thoroughly after handling. Do not eat, drink, or smoke when using this product. Contaminated work clothing should not be allowed out of the workplace. Avoid release to the environment. Wear protective gloves/protective clothing/eye protection/face protection. Dispose of contents/containers in accordance with local, regional, national and international regulations.

Caution: Disturbing lead paint creates hazardous dust that is harmful to children, pregnant women and workers.

See SDS for further information.

HIGH-BUILT NON-SAG MARINE EPOXY



HAZARD STATEMENTS:

Causes mild skin irritation. Cause serious eye irritation. May cause an allergic skin reaction. May cause allergy or asthma symptoms or breathing difficulties if inhaled.

PRECAUTIONARY STATEMENTS:

Keep out of reach of children. Avoid breathing dust/fume/gas/mist/vapors/spray. Wash thoroughly after handling. Contaminated work clothing should not be allowed out of the workplace. Wear protective gloves/protective clothing/eye protection/face protection. Dispose of contents/containers in accordance with local, regional, national and international regulations.

Caution: Disturbing lead paint creates hazardous dust that is harmful to children, pregnant women and workers.

See SDS for further information.



Sycwin Coating & Wires, Inc.

93 Joy St., Grace Village, Balingasa, Quezon City 1115 Philippines
Tel: (632) 8364-6001 to 06; 8364-5790; 3411-3491 to 93 • Fax: (632) 8364-3870
Email: hello@sycwin.com • Web: www.sycwin.com • Facebook: sycwinpaints