




DuraFloor

Solventless Epoxy Floor Coating

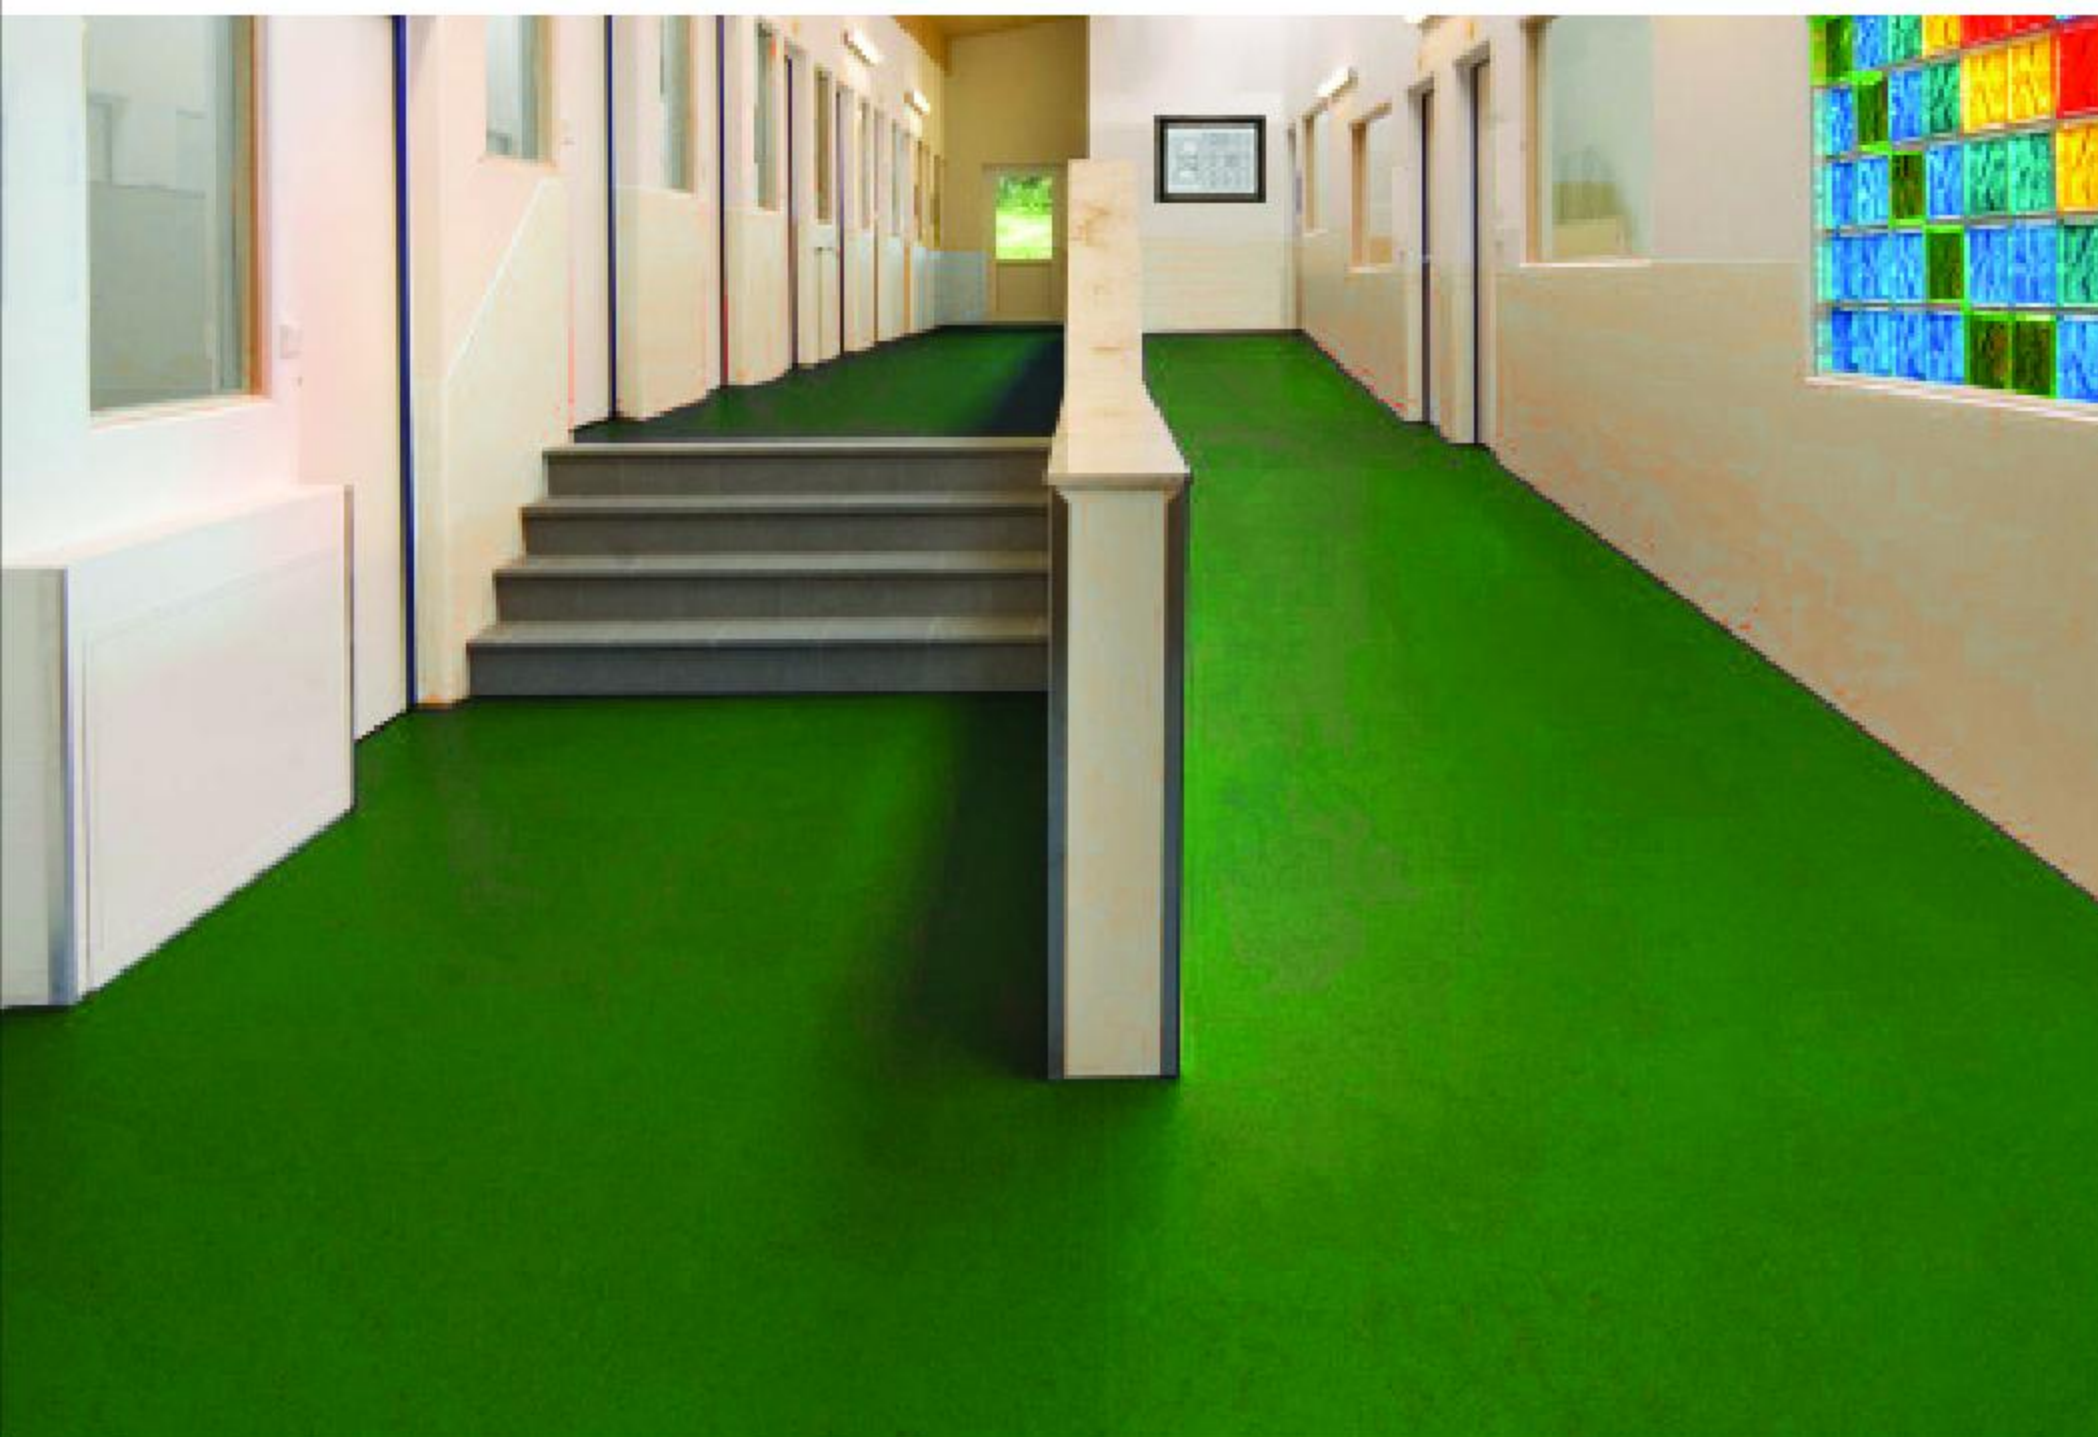

**IDEAL FOR
INTERIOR
FLOORING**

**Groceries
Warehouses
Offices**

**Restaurants
Parking Lots
Schools**



DuraFloor

Solventless Epoxy Floor Coating

Available Colors

(Also available in White and Black)

GUILDER DuraFloor Solventless Epoxy Floor Coating is a two component based paint, 100% solids heavy duty epoxy flooring coating. It imparts good resistance to chemicals, abrasion and moisture. It exhibits high gloss, hardness and good adhesion ideal for solvent free and self-leveling floor coating.

PHYSICAL PROPERTIES

Viscosity:	8,000 to 10,000 cps @ 20°C	Hardness:	H pencil
Density:	1.69 ± 0.02 kg/liter (Theoretical)	Adhesion:	100/100 cross hatch @ 1 mm
Gloss:	90 min @ 60° gloss meter	Impact:	25 cm x 1 kg - no crack

TECHNICAL INFORMATION

Mixing Ratio: Mix 3 parts by volume Guilder DuraFloor Solventless Epoxy Floor Coating to 1 part Guilder DuraFloor Epoxy Floor Coating Hardener (67-100-G)

Induction Time: 10 - 15 minutes before application

Pot Life: 1 - 1½ hour @ 28°C

Apply using steel trowel or spike roller and brush (for edges / corners only).

APPLICATION:

Concrete Surfaces:

1. Apply 1 coat of Guilder DuraFloor Epoxy Penetrating Sealer by brush or roller. Let it dry for 24 hours.
2. If necessary, putty surface imperfections with Guilder High Built Non Sag Epoxy
3. Finish with one coat of Guilder DuraFloor Solventless Epoxy Floor Coating Paint. Let it dry for 24 hours.

Steel Surfaces:

1. Apply 1 coat of Guilder Epoxy Primer by brush or roller. Let it dry for 24 hours.
2. Finish with one coat of Guilder DuraFloor Solventless Epoxy Floor Coating Paint. Let it dry for 24 hours.

Theoretical Coverage: 14 - 16 sqm per 4 liters

Drying Time: To Touch: 4 - 5 hours / Tack Free: 8 - 10 hours / Hard: 24 hours

SURFACE PREPARATION: For maximum paint performance, surface to be painted must be dry and in sound condition, free from loose dirt, dust, oil, grease and other foreign matter.

HAZARD STATEMENTS:

- Causes skin irritation.
- Causes serious eye damage.
- May cause an allergic skin reaction.
- Toxic to aquatic life with long lasting effects.

PRECAUTIONARY STATEMENTS:

Prevention: Keep only in original container. **Keep out of reach of children.** Avoid breathing dust/fume/gas/mist/vapors/spray. Wash skin thoroughly after handling. Avoid release to the environment. Wear protective gloves/protective clothing/eye protection/face protection. Dispose of contents/containers in accordance with local, regional, national and international regulations.

Response: If irritation occurs or if you feel unwell, get medical attention immediately. See SDS for further information.

Caution: Disturbing lead paint creates hazardous dust that is harmful to children, pregnant women and workers.



WARNING




Beige 65-124-G



Safety Yellow 65-204-G




Tile Red 65-330-G



Light Green 65-610-G



Safety Green 65-630-G



Light Blue 65-710-G



Crystal Blue 65-787-G



Silver Gray 65-800-G



Sycwin Coating & Wires, Inc.

93 Joy St., Grace Village, Balingasa, Quezon City 1115 Philippines
Tel: (632) 8364-6001 to 06; 8364-5790; 3411-3491 to 93 • Fax: (632) 8364-3870
Email address: sales@sycwin.com • Web: www.sycwin.com
Like us at www.facebook.com/sycwinpaints