




PureCoat[®]

Premium

DURATEX

FOR TOUGH EXTERIOR & INTERIOR
TEXTURED & PLAIN FINISHES




PureCoat[®]

Premium

DURATEX

FOR TOUGH EXTERIOR & INTERIOR
TEXTURED & PLAIN FINISHES

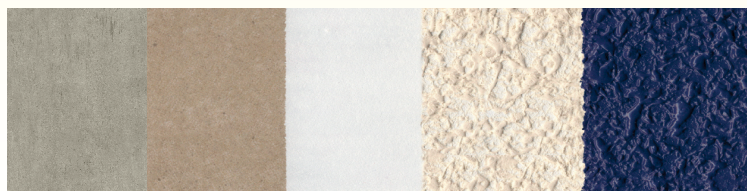

BARE CONCRETE PENETRATING SEALER PRIMER CAST TOPCOAT

NOTE: SAMPLE USING SPLATTER GUN

PureCoat Premium DURATEX Penetrating Sealer

An acrylic-solvent based coating intended to seal and smoothen the surface of new and old interior and exterior masonry, wood and fiber cement board. It also acts as water repellent.

PureCoat Premium DURATEX Primer

An acrylic-solvent based coating especially formulated to provide adhesion to adhere on surface and for forming a water tight film.

PureCoat Premium DURATEX Cast

An acrylic-solvent based coating intended for interior and exterior masonry, wood and fiber cement board whenever textured finish is desired. Also it can be used for putting hairline cracks and minor surface imperfection.

PureCoat Premium DURATEX Topcoat

An acrylic-solvent based coating that provides firm hard coating, low dirt pick-up, excellent gloss and a water tight film for new and previously painted interior and exterior masonry, wood and fiber cement board. Also, it has stronger resistance against mildew formation. It may be tinted to any desired pastel color.

DURATEX TECHNICAL INFORMATION

PRODUCTS	CODE #	PACKAGE VISCOSITY	DENSITY	% SOLIDS	APPLICATION METHOD	DRYING TIME	THEORETICAL COVERAGE
PureCoat Premium DURATEX Penetrating Sealer	78-1000-AK	20-30 seconds FC#4 @ 28°C	0.96 ± 0.02 kg / liter (theoretical)	By Weight: 26.55% By Volume: 26.28%	For brush and roller use as is. For spray, reduce 4 parts PureCoat Premium DURATEX Sealer with 1 part PureCoat Premium DURATEX Reducer.	To Touch: ¼ - ½ hr Tack Free: ½ - 1 hr Hard: 4-6 hrs	5.26 m ² / liter @ 50 microns D. F. T.
PureCoat Premium DURATEX Primer	78-1010-AK	80-90 KU @ 28°C	1.17 ± 0.02 kg / liter (theoretical)	By Weight: 50.03% By Volume: 33.90%	For brush and roller use as is. If necessary reduce with PureCoat Premium DURATEX Reducer. For spray, reduce 1 part PureCoat Premium DURATEX Primer White with 2 parts PureCoat Premium DURATEX Reducer.	To Touch: ¼ - ½ hr Tack Free: ½ - 1 hr Hard: 4-6 hrs	6.78 m ² / liter @ 50 microns D. F. T.
PureCoat Premium DURATEX Cast	78-8000-AK	80,000-90,000 CPS @ 28°C	1.53 ± 0.02 kg / liter (theoretical)	By Weight: 75.64% By Volume: 57.63%	For splatter spray gun, use as is; If necessary, reduce with PureCoat Premium DURATEX Reducer.	To Touch: ¼ - ½ hr Tack Free: ½ - 1 hr Hard: 4-6 hrs	5-6 m ² / 4 liter @ medium texture pattern
PureCoat Premium DURATEX Topcoat Gloss White Also available in Semi-Gloss & Flat Finish of any desired colors.	78-1200-AK	75-85 KU @ 28°C	1.106 ± 0.02 kg / liter (theoretical)	By Weight: 50.93% By Volume: 38.14%	For brush and roller use as is. If necessary reduce with PureCoat Premium DURATEX Reducer. For spray, reduce 1 part PureCoat Premium DURATEX Topcoat Gloss White with 2 parts PureCoat Premium DURATEX Reducer.	To Touch: ¼ - ½ hr Tack Free: ½ - 1 hr Hard: 4-6 hrs	7.63 m ² / liter @ 50 microns D. F. T.

Surface Preparation: For maximum paint performance, surfaces to be painted must be dry and in sound condition, free from loose dirt, dust, oil, grease and other foreign matter.

DURATEX TINTING COLORS (Semi-Gloss)



Lemon Yellow
78-1220-AK



Raw Sienna
78-1226-AK



Permanent Red
78-1244-AK



Thalo Green
78-1268-AK



Thalo Blue
78-1278-AK



Black
78-1290-AK



DANGER

HAZARD STATEMENTS:

Flammable liquid and vapor. Causes skin irritation. Causes serious eye irritation. May cause respiratory irritation. May be fatal if swallowed and enters airways. Suspected of causing cancer. Toxic to aquatic life.

PRECAUTIONARY STATEMENTS:

Keep container tightly closed. Keep away from heat/sparks/open flame/hot surfaces - NO SMOKING. **Keep out of reach of children.** Avoid breathing dust/fume/mist/vapors/spray. Wash thoroughly after handling. Use only outdoors or in well-ventilated area. Do not eat, drink or smoke when using this product. Avoid release to the environment. Wear protective gloves/protective clothing/eye protection/face protection. Dispose of contents/containers in accordance with local, regional, national and international regulations.

Caution: Disturbing lead paint creates hazardous dust that is harmful to children, pregnant women and workers.

See SDS for further information.



Sycwin Coating & Wires, Inc.

93 Joy St., Grace Village, Balingasa, Quezon City 1115 Philippines
Tel: (632) 8364-6001 to 06; 8364-5790; 3411-3491 to 93 • Fax: (632) 8364-3870
Email: hello@sycwin.com • Web: www.sycwin.com • Facebook: sycwinpaints