


# PureCoat<sup>®</sup>

*Premium*

## ULTRATEX

THE ULTIMATE EXTERIOR & INTERIOR  
WATERBASED TEXTURED FINISH

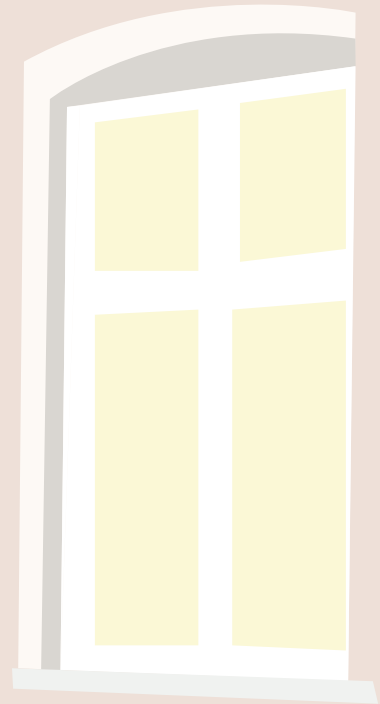



# ULTRATEX

THE ULTIMATE EXTERIOR & INTERIOR  
WATERBASED TEXTURED FINISH

## PureCoat Premium **ULTRATEX** Hi-Profile Water-Based Textured Paint Flat White

An acrylic water-based coating intended for exterior and interior masonry, wood and fiber cement board whenever a decorative textured finish is desired. It is designed to cover minor surface imperfections such as small cracks and indentations on walls and ceiling, to give a hi-profile textured finish appearance.



BARE CONCRETE



PRIMER



TEXTURED PAINT FLAT WHITE

NOTE: SAMPLE USING RAIN PRINT PATTERN ROLLER

## PureCoat Premium Wondercyl Acrylic Latex High-Hiding Undercoat Concrete Primer White

A 100% acrylic water-based primer especially designed to prepare concrete and masonry surfaces for succeeding coats. It seals porous surfaces and provides excellent durability, hiding, adhesion, and fungi, water and humidity resistance for both interior and exterior surfaces.

## ULTRATEX TECHNICAL INFORMATION

PRODUCTS	CODE #	PACKAGE VISCOSITY	DENSITY	% SOLIDS	APPLICATION METHOD	DRYING TIME	THEORETICAL COVERAGE	REDUCTION
PureCoat Premium Wondercyl Acrylic Latex High-Hiding Undercoat Concrete Primer White	46-110-AK	100-105 KU @ 28°C	1.40 ± 0.02 kg / liter (theoretical)	By Weight: 52.00% By Volume: 33.11%	1st Coat: Primer Coat - Apply by brush, roller or spray with PureCoat Premium Wondercyl Acrylic Latex High-Hiding Undercoat Concrete Primer White.	To Touch: ¼ - ½ hour Tack Free: ½ - 1 hour Hard: 1-2 hours	25-30 m² / 4 liter @ 50 microns D. F. T.	Apply at package consistency. If necessary, use a maximum ¼-liter clean water per 4 liter paint.
PureCoat Premium <b>ULTRATEX</b> Hi-Profile Water-Based Textured Paint Flat White	77-1000-AK	120,000 - 140,000 Centipoises	1.57 ± 0.02 kg / liter (theoretical)	By Weight: 68.00% By Volume: 50.00%	2nd Coat: Textured Finish - Apply by pattern roller or spray using mortar gun with PureCoat Premium <b>ULTRATEX</b> Hi-Profile Water-Based Textured Paint Flat White to any desired pattern like small, medium or large textured effect.	Surface Dry: 1-2 hours Dry through: 12-16 hours	Approximately 4-8 m² / 4 liters of paint depending on pattern thickness	Reduce as necessary only with clean water

**Surface Preparation:** For maximum paint performance, surfaces to be painted must be dry and in sound condition, free from loose dirt, dust, oil, grease and other foreign matter.



CRACKING FREE




FADING FREE




PEELING FREE



WASHABLE



WATER ALKALI  
RESISTANT



UV PROTECTED



**WARNING**

### HAZARD STATEMENTS:

Causes skin and serious eye irritation. May cause respiratory irritation.

### PRECAUTIONARY STATEMENTS:

Keep container tightly closed. **Keep out of reach of children.** Avoid breathing dust/fume/mist/vapors/spray. Wash thoroughly after handling. Do not eat, drink or smoke when using this product. Use only outdoors or in a well-ventilated area. Wear protective gloves/protective clothing/eye protection/face protection. Dispose of contents/containers in accordance with local, regional, national and international regulations.

Caution: Disturbing lead paint creates hazardous dust that is harmful to children, pregnant women and workers.

See SDS for further information.



**Sywin Coating & Wires, Inc.**

93 Joy St., Grace Village, Balingasa, Quezon City 1115 Philippines  
Tel: (632) 8364-6001 to 06; 8364-5790; 3411-3491 to 93 • Fax: (632) 8364-3870  
Email: sales@sywin.com • Web: www.sywin.com • Facebook: sywinpaints

PCPU Rev. 0 Oct. 19, 2020